



玉米电子科技
CORN ELECTRONIC TECHNOLOGY

LED激光大灯

LED LASER HEADLIGHTS



超光亮
Super Bright



寿命长
Long lifespan



升级首选
Upgrade preferred



Y | 系列车灯
Series car lights

原车亮度10倍提升

The brightness of the original car has been increased by 10 times

流明度提高100%

The luminance is increased by 100%

进口LED芯片灯珠

Imported LED chip beads

中山市玉米电子科技有限公司
Zhongshan Yumi Electronic Technology Co., Ltd.

流明度提高100%

THE LUMINANCE IS INCREASED BY 100%

原车亮度10倍提升

THE BRIGHTNESS OF THE ORIGINAL CAR HAS
BEEN INCREASED BY 10 TIMES

进口LED芯片灯珠

IMPORTED LED CHIP BEADS

L1

产品用料/Product materials

双铜管/Double copper tube
子弹头/Bullet
双片航空铝材（无尾盖）外置驱动
Double piece aviation aluminum material (No tailgate) external drive
液压散热风扇/Hydraulic cooling fan
6*45miu灯珠/6*45miu LED beads
三安芯片/Sanan chip



技术参数/Technical parameter

启动功率 Starting power	稳定功率 Stable power	流明 Luminous	色温 CRI	电压 Voltage
45W	35W	4500Lm	6300K	12V专用 Dedicated

L2

产品用料/Product materials

双铜管/Double copper tube
子弹头/Bullet
双片航空铝材,内置驱动
Double piece aviation aluminum material, built in driver
液压散热风扇/Hydraulic cooling fan
6*45miu灯珠/6*45miu LED beads
三安芯片/Sanan chip



技术参数/Technical parameter

启动功率 Starting power	稳定功率 Stable power	流明 Luminous	色温 CRI	电压 Voltage
35W	30W	3000Lm	6300K	12V专用 Dedicated

L5

产品用料/Product materials

双铜管/Double copper tube
子弹头/Bullet
双片航空铝材,内置驱动
Double piece aviation aluminum material, built in driver
液压散热风扇/Hydraulic cooling fan
6*55miu灯珠/6*55miu LED beads
三安芯片/Sanan chip



技术参数/Technical parameter

启动功率 Starting power	稳定功率 Stable power	流明 Luminous	色温 CRI	电压 Voltage
55W	45W	5500Lm	6300K	12-80V

L6

产品用料/Product materials

双铜管/Double copper tube
子弹头/Bullet
双片航空铝材,外置驱动
Double piece aviation aluminum material, external drive
液压散热风扇/Hydraulic cooling fan
6*45miu灯珠/6*45miu LED beads
三安芯片/Sanan chip



技术参数/Technical parameter

启动功率 Starting power	稳定功率 Stable power	流明 Luminous	色温 CRI	电压 Voltage
65W	50W	6500Lm	6300K	12V-80V

L7

产品用料/Product materials

双铜管/Double copper tube
双片航空铝材（无尾盖）外置驱动
Double piece aviation aluminum material (No tailgate) external drive
液压散热风扇/Hydraulic cooling fan
6*55miu灯珠/6*55miu LED beads
三安芯片/Sanan chip



技术参数/Technical parameter

启动功率 Starting power	稳定功率 Stable power	流明 Luminous	色温 CRI	电压 Voltage
70W	50W	7000Lm	6300K	12-80V

L9

产品用料/Product materials

双铜管/Double copper tube
双片航空铝材（无尾盖）外置驱动
Double piece aviation aluminum material (No tailgate) external drive
液压散热风扇/Hydraulic cooling fan
9*55miu灯珠/9*55miu LED beads
三安芯片/Sanan chip



技术参数/Technical parameter

启动功率 Starting power	稳定功率 Stable power	流明 Luminous	色温 CRI	电压 Voltage
80W	70W	8000Lm	6300K	12V-80V



K | 系列车灯

Series car lights



产品用料/Product materials

双片航空铝材/Double piece aviation aluminum material
液压散热风扇/Hydraulic cooling fan



超光亮
Super Bright



寿命长
Long lifespan



升级首选
Upgrade preferred

技术参数/Technical parameter

型号 Model No.	灯珠 LED Beads	启动功率 Starting power	稳定功率 Stable power	流明 Luminous	色温 CRI	电压 Voltage	板材 Board	备注 Remarks
K11	3*75miu	55W	35W	4000Lm	6300K	12-80V	1.5铜基板 1.5 Copper substrate	/
K12	12*51miu	90W	70W	9000Lm	6300K	12-80V	双铜管 Double copper tube	/
K13	12*51miu	120W	75W	12000Lm	6300K	12-80V	三铜管 Three copper tubes	/



玉米电子科技
CORN ELECTRONIC TECHNOLOGY

N | 系列车灯

Series car lights



产品用料/Product materials

双片航空铝材/Double piece aviation aluminum material
液压散热风扇/Hydraulic cooling fan
三安芯片/Sanan chip



超光亮
Super Bright



寿命长
Long lifespan



升级首选
Upgrade preferred

技术参数/Technical parameter

型号 Model No.	灯珠 LED Beads	启动功率 Starting power	稳定功率 Stable power	流明 Luminous	色温 CRI	电压 Voltage	板材 Board	备注 Remarks
N10	6*45miu	45W	35W	4500Lm	6300K	12V	1.5铜基板 单铜管	12V专用 Dedicated
N11	6*55miu	70W	55W	7000Lm	6300K	12-80V	Single copper tube 双铜管	/
N12	6*55miu	70W	55W	7000Lm	6300K	12-80V	Double copper tube 双铜管	/
N13	12*55miu	120W	75W	12000Lm	6300K	12-80V	Double copper tube 四铜管	/
N14	12*55miu	120W	80W	12000Lm	6300K	12-80V	Four copper tubes	/



V | 系列车灯

Series car lights



产品用料/Product materials

双片航空铝材/Double piece aviation aluminum material
液压散热风扇/Hydraulic cooling fan
三安芯片/Sanan chip



超光亮
Super Bright



寿命长
Long lifespan




升级首选
Upgrade preferred

技术参数/Technical parameter

型号 Model No.	灯珠 LED Beads	启动功率 Starting power	稳定功率 Stable power	流明 Luminous	色温 CRI	电压 Voltage	板材 Board	备注 Remarks
V31	6*55miu	55W	45W	5500Lm	6300K	12-80V	单铜管 Single copper tube	12V专用 Dedicated
V32	9*55miu	90W	70W	9000Lm	6300K	12-80V	双铜管 Double copper tube	/
V33	12*55miu	150W	85W	15000Lm	6300K	12-80V	四铜管 Four copper tubes	/
V22	9*55miu	110W	75W	11000Lm	6300K	12-80V	双铜管 Double copper tube	电镀 Electroplate
V11	12*55miu	一档/One file-130W 二档/Second tier-60W	一档/One file-85W 二档/Second tier-55W	13000Lm	6300K	12-80V	双铜管 Double copper tube	双档位 Dual gear

中山市玉米电子科技有限公司
Zhongshan Yumi Electronic Technology Co., Ltd.

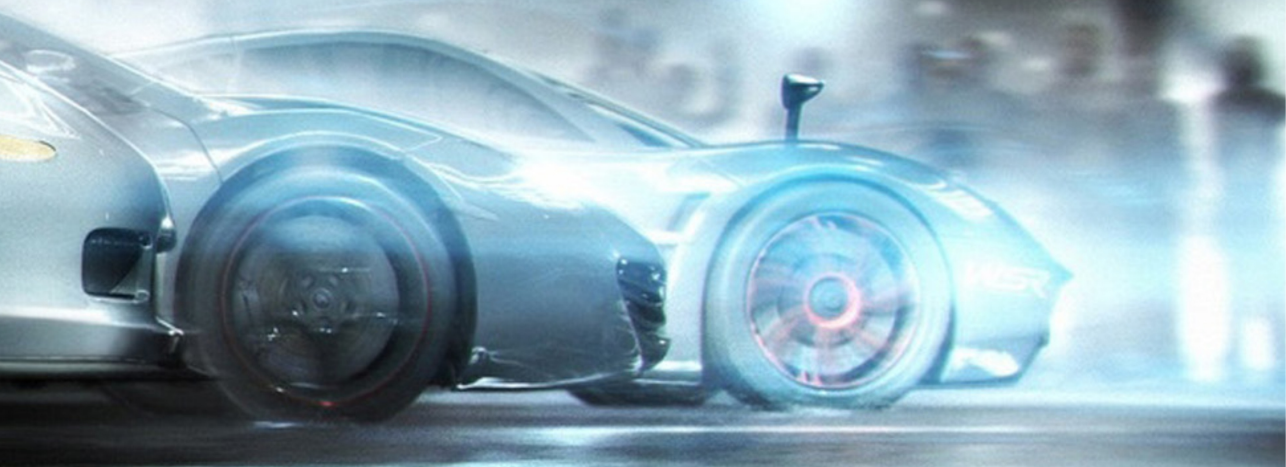



中山市玉米电子科技有限公司
Zhongshan Yumi Electronic Technology Co., Ltd.



地址：中山市城南四路长环工业区C区三楼
Add: Third floor, Area C, Changhuan Industrial Zone,
Chengnan Fourth Road, Zhongshan City.



赵广波/Mr. Zhao: 166 2516 3999
刘昊天/Mr. Liu: 133 5635 4175



玉米电子科技
CORN ELECTRONIC TECHNOLOGY